MDC v. ALLSTATE Box/File No.<u>2-12/7</u> B/111

Woodward-Clyde Consultants

RWOLLS COPY.

REPORT ON INSTALLATION
OF OBSERVATION WELLS
WCC-11S AND WCC-12S
AT DOUGLAS AIRCRAFT COMPANY'S
FACILITY IN TORRANCE, CALIFORNIA

Prepared for:

Douglas Aircraft Company 4900 Airport Plaza Drive Long Beach, California

Prepared by:

Woodward-Clyde Consultants 2020 East First Street, Suite 400 Santa Ana, California 92705

> Project No. 8941863J March 1992



BOE-C6-0221633

TABLE OF CONTENTS

Section	<u>on</u>		Page
1.0	INT	RODUCTION	1-1
2.0	FIEI	LD PROCEDURES	2-1
	2.1 2.2	DRILLING AND SOIL SAMPLING WELL INSTALLATION	2-1 2-1
3.0	LAB	SORATORY RESULTS	3-1
4.0	CON	ICLUSION	4-1

LIST OF TABLES

- 1 Concentrations of VOC's in Selected Soil Samples
- 2 Summary of Analytical Results for Groundwater Samples

LIST OF FIGURES


1 Observation Well/Soil Boring Location Map

LIST OF APPENDIXES

- A Field Procedures
- B Boring Logs and Sieve Analysis
- C Analytical Results and Chain-of-Custody

As part of the soil and groundwater monitoring investigation at Douglas Aircraft Company's Torrance (C-6) facility located at 19503 S. Normandie Avenue, Los Angeles, California, Woodward-Clyde Consultants (Woodward-Clyde) installed two additional observation wells (WCC-11S and WCC-12S) at the facility. These wells were installed to help delineate the extent of organic compounds in the groundwater, in the vicinity of Tanks 15T to 18T at this facility. Locations of observation wells WCC-11S and WCC-12S (along with the locations of existing observation wells) are shown on Figure 1. The wells were developed and sampled, and the analytical results obtained from sampling the wells are also presented in this report.

FIGURE 1 OBSERVATION WELL/SOIL BORING LOCATION MAP

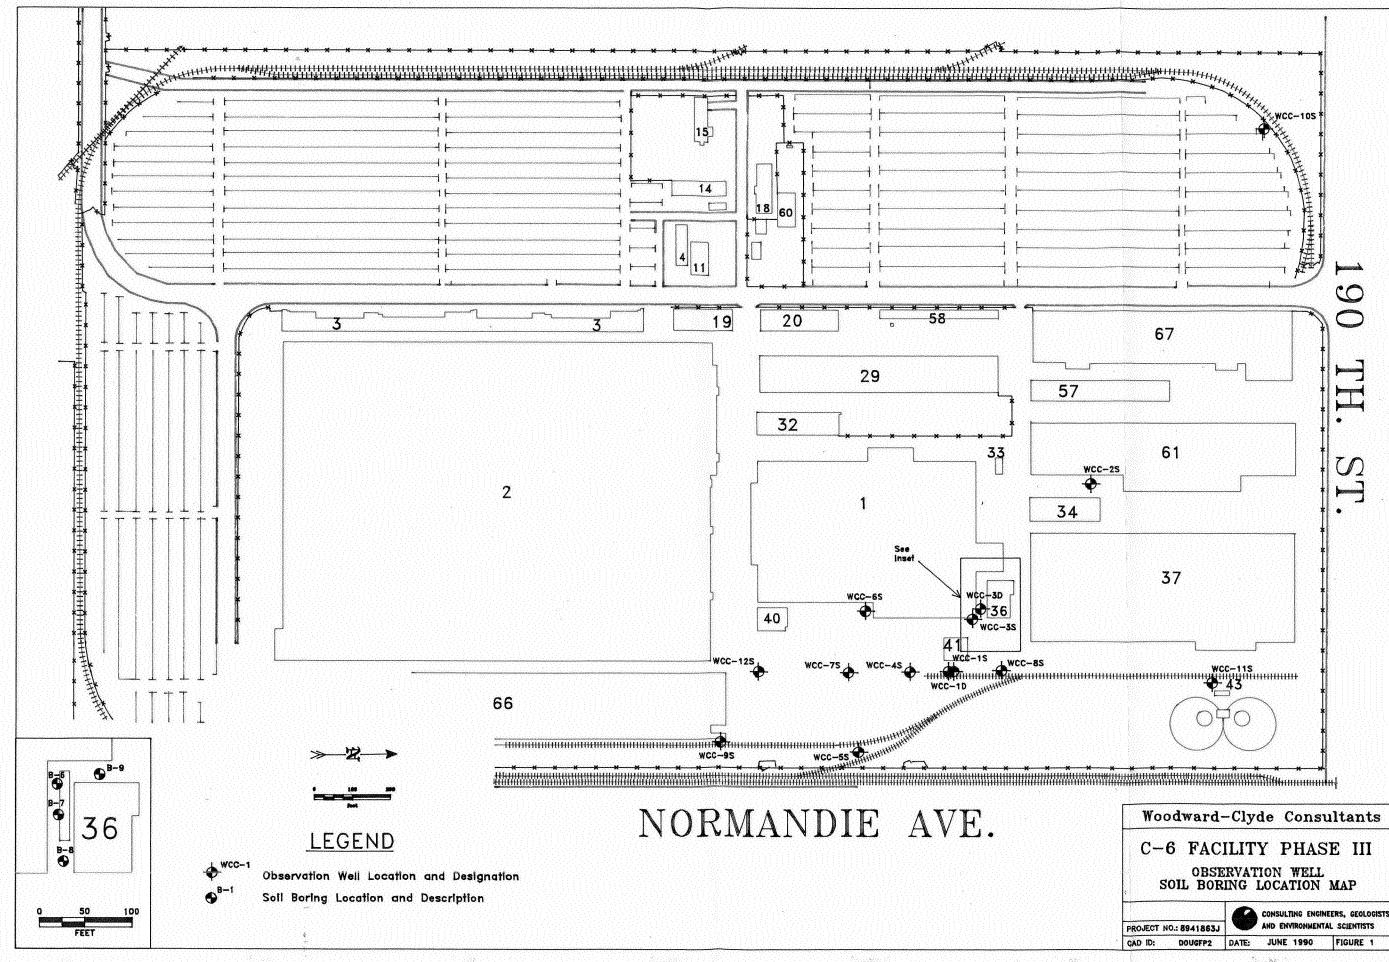

2.1 DRILLING AND SOIL SAMPLING

The two observation wells (WCC-11S and WCC-12S) were drilled during the period September 12 to 17, 1990 at the C-6 facility. They were advanced to approximately 90 feet below ground surface. Soil samples were collected at 5-foot intervals using a modified California sampler. The collected soil samples were delivered to West Coast Analytical Services, a State-certified laboratory for analysis. Drilling, soil sampling and equipment documentation procedures, are presented in Appendix A. Boring logs are presented in Appendix B.

2.2 WELL INSTALLATION

Observation wells WCC-11S and WCC-12S were installed to a depth of approximately 90 feet below ground surface using a 10-inch outside diameter hollow stem auger. The depth of the uppermost water bearing zone was encountered at approximately 68 feet below ground surface. The observation wells were constructed of 4-inch outside diameter PVC casing and well screen. The well casing and screen were flush-threaded; PVC cement was not used to couple the casing. A sieve analysis was performed on a representative sample of the water bearing unit from each observation well. The results of this analysis were used to select an appropriate sand pack and screen perforation for the observation wells (Appendix B). After installation, the observation wells were developed by bailing groundwater until it was free of suspended matter and water temperature, pH, and electrical conductivity had stabilized. Groundwater samples were collected on October 10, 1990.

Soil samples collected from the observation well borings at the water table were analyzed for volatile organic compounds (VOCs) by EPA Method 8240. Groundwater samples collected from the observation wells WCC-11S and WCC-12S were also analyzed for VOCs by EPA Method 624. Full laboratory analytical reports are presented in Appendix C. The soil analytical results, summarized in Table 1, indicate low concentrations of trichloroethylene (TCE) in the soil samples at the water table. No other VOCs as necessary by EPA Method 8240 were detected in the soil samples.

A trip blank and three groundwater samples collected from the observation wells were analyzed for VOCs by EPA Method 624. One sample (WCC-11S-1B) was collected from observation well WCC-11S and two water samples (WCC-12S-1B and WCC-12S-1C) were collected from observation well WCC-12S. The groundwater analytical results are summarized in Table 2. Several chlorinated hydrocarbons were detected in the water samples, with trichloroethylene and 1,1-dichloroethene present at the highest concentrations.

TABLE 1 CONCENTRATIONS OF VOCs IN SELECTED SOIL SAMPLES

Sample No.	Sample Depth (feet)	TCE (mg/kg)
WCC-11-14-3	70	9
WCC-12-14-3	70	14
WCC-12-15-3	75	26

TABLE 2 SUMMARY OF ANALYTICAL RESULTS FOR GROUNDWATER SAMPLES $^{(1)}$

Concentration (µg/l) ⁽²⁾										
Sample No.	1,1-DCE	1,1-DCA	1,1,1-TCA	TCE	trans- 1,2-DCE	Chloroform	Benzene	cis- 1,2-DCE		
WCC-11S-1B	3	<1	<1	21	<1	<1	<1	1		
WCC-12S-1B	1,100	15	86	1,700	15	8	5	36		
WCC-12S-1C	930	12	73	1,500	13	7	4	31		

NOTES:

- Samples analyzed by EPA Method 624. 1,1-DCE = 1,1-dichloroethene (1) (2) 1,1-DCA = 1,1-dichloroethane 1,1,1-TCA = 1,1,1-trichloroethane TCE = trichloroethene trans-1,2-DCE = trans-1,2-dichloroethene cis-1,2-DCE = cis-1,2-dichloroethene

The analytical results indicate that the southern and western extent of the plume has not been completely delineated, but the northern and eastern extent of the plume has been roughly defined.

APPENDIX A FIELD PROCEDURES

Samples analyzed, including QA/QC samples and blanks, were given a unique sample number. A listing of sample numbers, cross-referenced to chain-of-custody and shipment documents, were maintained in the field notebook.

For each soil sample, a unique identification number was used. The project sample number was used for tracking the sample in the field, tracking of the sample and subsequent analytical data results in the laboratory, and presentation of data in the report.

Documenting Sample Locations

Collected samples were documented in a field notebook, which was submitted to the project manager after completion of the sampling program. The site conditions at the time of sampling was documented in the field notebook, including weather conditions, temperature, time of sampling, and type of samples. Any unusual conditions was brought to the attention of the field manager and the same was recorded in the field notebook. The field notebook was always in the possession of the sampling crew leader and during non sampling periods was stored in a safe place. Samples were collected from predesignated locations. Any deviation was made with the consent of the project manager.

A.1 SAMPLING AND WELL INSTALLATION PROCEDURES

This section provides the procedures which were followed for the soil and groundwater sampling. Details of borehole drilling, well installation, and well development were also described.

Soil Sampling Protocol

Borings were advanced using a CME-75 with a 10-inch outside diameter hollow stem auger. Soil samples were collected at 5-foot intervals. When the desired depth was reached, the rods were retrieved and a soil sample was obtained with a modified California sampler. Samples were advanced 18 inches by repeated drop of a 140 pound hammer. Blow-counts were recorded. The samplers were decontaminated, after collection of each sample as follows:

- Brush-assisted water rinse to remove soil and mud
- Brush-assisted water wash with Liquinox
- Deionized water rinse to remove Liquinox
- Second deionized water rinse
- Drying with paper towels.

Sample collection and lithologic description utilized soil contained within four 4-inch brass tubes held within the modified California sampler. The third tube was capped immediately and preserved on ice for shipment to the laboratory. Samples from the upper and lower rings were utilized for lithologic description and headspace analysis. One of the brass tubes was emptied into a zip-loc bag and analyzed for headspace and screened with an OVA.

A.2 WELL INSTALLATION AND SAMPLING

Observation wells were installed upon completion of the soil boring using the drill rig equipped with the hollow-stem augers. The augers were steam cleaned prior to use at the site. The geologist on site recorded soil characteristics, sample locations, and drilling information on boring logs.

Observation wells were constructed of Schedule 40 PVC 4-inch outside diameter screen and blank casing. A 30-foot screen extended from the bottom of the boring (approximately 90 feet) to approximately 60 feet below ground surface and had a slot

size of 0.010 inch. The casing was suspended just above the bottom of the borehole and the annular space was backfilled with a filter pack of No. 0/30 Monterey Sand to a level approximately 3 to 4 feet above the top of the screen. Approximately 2 feet of bentonite pellets was placed in the annulus above the filter pack, hydrated with bottled water, followed by a slurry of cement and bentonite or enviroplug bentonite to about 2 feet below the surface. A traffic-rated well cover was grouted in place, flush with the surface using cement, and the wells were fitted with locking well caps.

Observation wells were developed using a surge block and bailer. At least three to five casing volumes of water were removed during development, while measuring water quality parameters (pH, conductivity, and temperature). Development was considered complete when the water quality parameters stabilized. Stabilization was achieved when the pH was constant within 0.1 units and conductivity did not vary by 10 percent from the previous reading.

Prior to water sampling, the wells were purged of at least three well casing and filter pack volumes and monitored for stabilization. Each well was bailed and sampled utilizing a Teflon bailer. Rope used during bailing was discarded after use in each well. The sampling containers are outlined in Section A.3. Sampling was analyzed according to EPA Method 624.

Water and cuttings removed during development, purging and drilling were retained and sealed in 55-gallon DOT drums. Based on water quality and soil analytical results, disposition consisted of on-site disposal, off-site disposal, or treatment by Douglas Aircraft Company.

A.3 SAMPLE HANDLING

Samples collected during this investigation were treated as low concentration level samples for the purpose of shipping and handling. The following Sections provide the sample containers and preservation procedures and sample packing and shipment procedures.

Sample Containers and Sample Preservation

The samples collected during this investigation were submitted for the analysis of chemical parameters identified in Section 3.0. Soil samples were collected in 4-inch brass sample tubes and preserved on ice immediately after collection and during shipment.

Groundwater samples were collected in 40-mil VOA vials and preserved on ice. Care will be taken to see that no air bubbles are present in each sample bottle. The VOA bottles were obtained from a State-certified laboratory.

Sample Packing and Shipment Procedures

Following the sampling, the exterior of all sample rings and bottles were initially decontaminated near the sampling location by wiping the outer surface with a moist cloth. The filled sample sleeves and bottles were not sprayed with water during decontamination as this water may compromise sample integrity. In preparation for shipment, all samples were packaged in accordance with the following procedures:

- Checked to make sure sleeve cap was securely tightened.
- Checked to make sure that the sample numbers were legible using waterproof ink, and that sample labels were securely attached to the sample containers. Placed each container in a Zip-loc bag or equivalent.
- Samples were placed in a cooler lined with two inches of vermiculite or equivalent non- combustible absorbent material. Additional space in the cooler was filled with additional packing material, ensuring that the samples were separated.
- Chain-of-custody forms were placed in a Zip-loc type bag and taped to the inside of cooler lid. A chain-of-custody form accompanied samples at all times.
- The cooler lid was closed and sealed with duct tape. The cooler drain port was sealed shut with tape.

 All samples were transported to the laboratory as required for proper analysis within specified holding times. Samples were picked up by a messenger for delivery to the laboratory.

The field supervisor confirmed the sample shipment and any deviations from the original plan was noted in the field notebook.

A.4 SAMPLE DOCUMENTATION AND TRACKING

The following section provides the procedures which were followed for documenting field conditions, observations and other pertinent data.

Field Records

Field observations and other pertinent sampling information were recorded in the field and entries were made in a bound log book and/or on boring log sheets. The data recorded in the daily log book for each sample included the date, time (military time reference), sample number, sample appearance, and name of the person who collected the sample. In addition, general information was recorded in the field notebook, which included personnel present at the site, level of protection being worn at the time of sampling, and weather conditions. OVA readings obtained from safety monitoring of the breathing zone during sampling activities were also recorded in the field notebook to document sampling activities. For groundwater samples the temperature, pH, and conductivity were also recorded.


Field Chain-of-Custody Procedures


All samples were accompanied by a properly completed chain-of-custody form. The sample numbers and locations were listed on the form. When transferring possession of samples, the individuals relinquishing and receiving signed, dated, and noted the time on the chain-of-custody. This record documents the transfer of samples from the sampler to the permanent laboratory, or to/from a secured storage area.

The original record accompanied the shipment, and additional copies were retained by the sampler to be returned to the project manager project files.

APPENDIX B BORING LOGS AND SIEVE ANALYSIS

BORI	NG See Location Map				ELE	EVA D D	TION ATUM	Not	Availa	ble	
DRIL	LING A & R Drilling Inc. DRILLER	S. K	oster		DA' STA	TE		9/12/9	0	DATE FINISH	ED 9/13/90
DRIL	ING CASE 75 UT with 11 inch O D Hollow-S	tem /	Auger		TO	ΓAL	DEPT ED (ft)	^H 91	.0	ROCK DEPTH	(ft) -
TYPE	OF Schodule 40 DVC SCRE	EN		0.0	10"	DI	AMET	ER OF	11	I C	DIAMETER OF 4 VELL (in.)
TYPE	/SIZE OF 0/20 Montarey Sand TYPE/TH	ICKN	ESS	D.	ontor	ita i	nellets	(1/4") fr	om 56' t om 53' (o 53':	
		ISTUE	RBED:	16		CC	RE: () LC	OGGED	BY :	H. Reyes
	ER DEPTH (ft) FIRST: 69.1 COMPLETION: 6	3.7	. 2	4 HC	UR	_			IECKEI	O BY	M. Razmdjoo
			Į				SAMI	PLES O\	/^		
eet		Ιğ	=					(pp	m)	ية ق	
Ŧ	DESCRIPTION	<u></u>	_ 5		per		ֹֻעַן ׁ	- e	-	NH NH	REMARKS
DEPTH, feet		LITHOLOGIC	WELL COMPLETION	00	Number	Type	Blow Count	Head- space	Back- ground	DRILLING RATE (time)	
Δ					<u> </u>		шО	Τ &	8	1028	
	Damp, yellowish brown, SILTY fine-grained SAND (SM) [Fill?].	-									
-	CANDY OUT AND FERIOR	-##	H								
-	Moist, olive brown, SANDY SILT (ML) [Fill?].	111									
_		111									
5-		111			1		4	44	21	1030	
-	Soft, wet, black, SANDY CLAY (CL) [Fill?].				1_						
-	Soft, wet, black, Strice 1 early (-2) (1				1						
-	Very stiff, moist, yellowish brown, SILTY CLAY (CL).	- 4//									
-	very start, monte, your wish of our, 2020 1 2221 (22)				1						
10-					2		27	50	23	1039	
-		1///			1—			-			
-											
	Medium dense, moist, dark olive brown, SANDY SILT										
15-	(ML), micaceous.				3		10	34	23	1046	
					1						
20	D lassa maga CANIDV							ļ ·		1055	
20-	Becomes loose, more SANDY.				4		8	42	23	1056	
1								1			
ļ	Becomes medium dense, more micaceous.										
25	becomes mediam dense, more misses as:				3 5		12	33	30	1102	
		-									
	4										
	1										
	4										
30	-	-			6		13	39	30	1108	i
	1	1			<u> </u>						
\vdash		T^{\sqcup}	11/22	112	71	- 1	1	<u> </u>		1	
	roject: Douglas Aircraft		_00	; (OF	:	BOF	RINC	S W	CC-	-11 Figure 1 1 of 3
P	roject Number: 8941863J									_	1 01 3

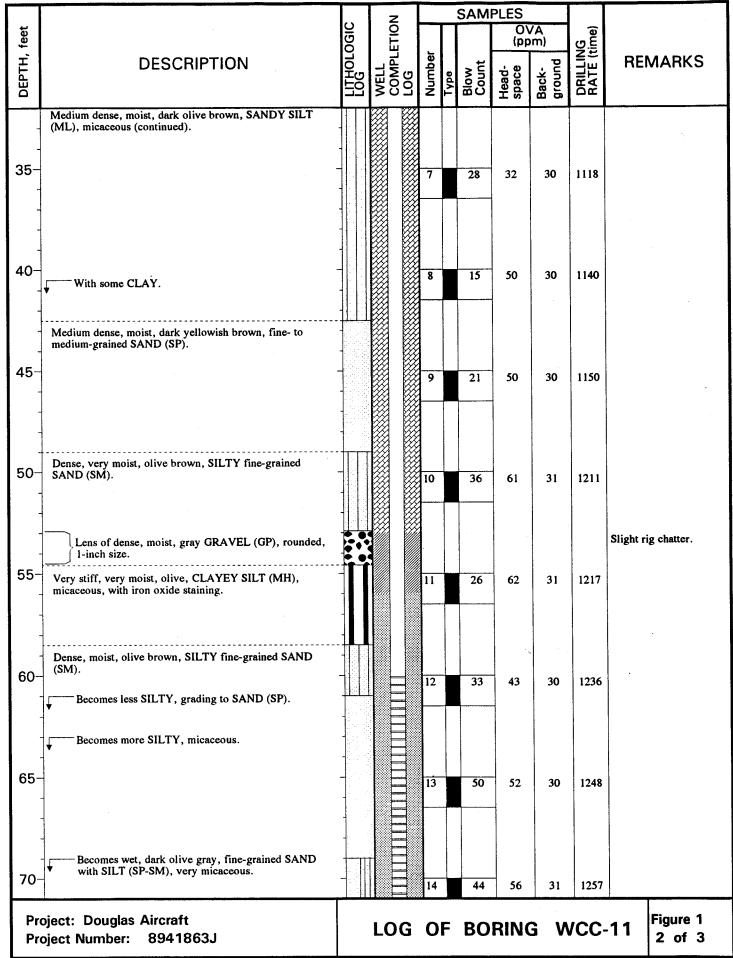

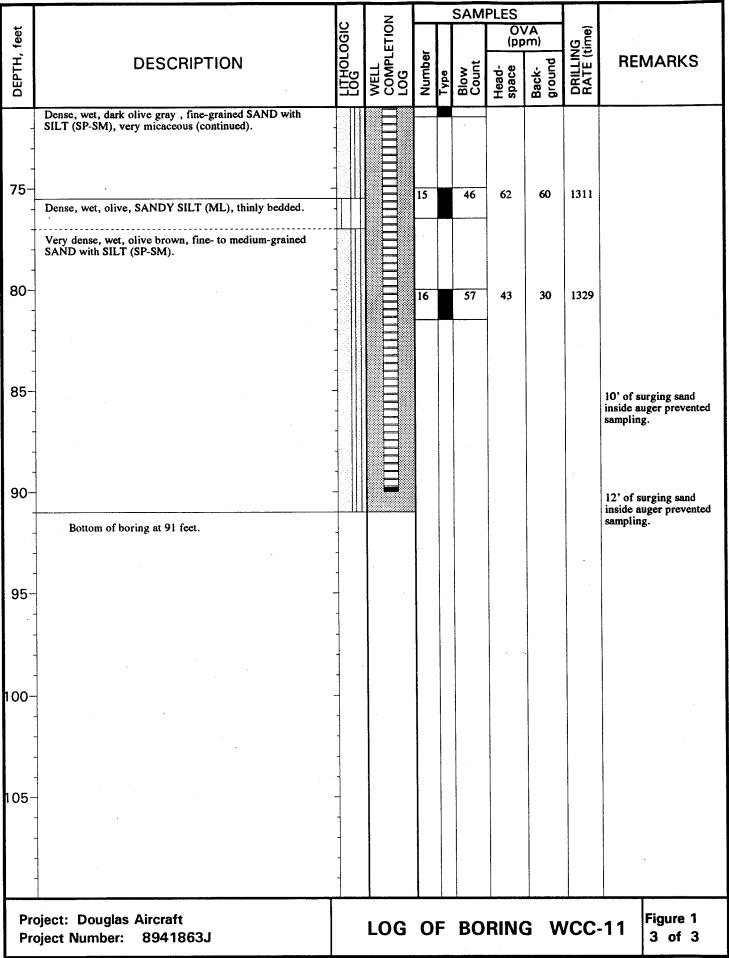

3/11/92 2WLOG DACCO

BORI LOCA	NG ATION See Location Map					ELI	EVA D D	ATION DATUM	1 No	t Avail	able	
DRIL AGE	LING A & R Drilling, Inc. DRILLER	s	. К	oster		DA ST	TE		9/17/9	90	DATE FINISI	HED 9/17/90
DRIL EQUI	LING PMENT CME 75 HT, with 11-inch-O.D. Hollow-	Ster	n A	uger		TO	TAI	DEPI ED (ft)	TH 91	1.5	ROCK DEPTH	
	CASING Schedule 40 PVC PER	EEN FOR	AT	ION	0.0	10"	D		TER OF	11		DIAMETER OF 4 WELL (in.)
	/SIZE OF 0/30 Monterey Sand TYPE/TI OF SEAI	HICH	(NE	SS	Be	entor	iite iite	pellets cement	(3/8") fi grout f	rom 55° rom 52.	to 52.5' 5' to su	; face
	BER OF SAMPLES DISTURBED: 0 UNI	DIST	UR	BED:	18		CC	ORE: (0 L	OGGED	BY	H. Reyes
WAL	ER DEPTH (ft) FIRST: 69.4 COMPLETION:	D0.5				OUR		SAMI		HECKE	DBI	M. Razmdjoo
et		<u></u>	2	WELL COMPLETION			П	SAM		/A	<u></u>	
l, fe	DESCRIPTION	S				_			(pp	m)	₽	
DEPTH, feet	DESCRIPTION	Ē	LöG	Ĩ. MPI	ر ن	Number	0	Blow Count	- eg	Back- ground	DRILLING RATE (time)	REMARKS
DE		目		≥8	9	Ž	Туре	မ္တင္ပ	Head- space	Back- groun	AA A	
	6 inches asphalt concrete.										0845	
_	Moist, dark yellowish brown, SANDY CLAY, with fine GRAVEL [Fill].											
-	Medium dense, moist, dark yellowish brown, SILTY fine-grained SAND (SM).											
5-		-				i		24	22	8	0852	
	₩ith trace CLAY.											
10-		-				2		15	28	8	0859	
											:	
-	Medium dense, moist, olive brown, SANDY SILT (ML) to SILTY SAND (SM).											·
15-		-				3		18	34	9	0908	
-												
-												
20-	Becomes moist to very moist.	1				4		25	34	9	0915	
-	•					-			34	,	0913	
+	Very stiff, moist, olive brown, SANDY CLAY (CL).	- 2										
25-												
						5		23	30	9	0923	
	Dense, moist, olive brown, fine-grained SAND with SILT (SP-SM).											
30-		1				6		34	36	10	0935	
Pro	ject: Douglas Aircraft		88 3								r:	
	ject Number: 8941863J	Į	_O	G	0	F	В	ORI	ING	W	CC-	12 Figure 2 1 of 3


3/11/92 2WLOG DACCO

Т		T	7		(SAM	PLES			•
DEFIN, leet	DESCRIPTION	LOG	COMPLETION LOG	Number	Туре	Blow Count	Head- Space 50	Back- 3 b ground	DRILLING RATE (time)	REMARKS
2 	Dense, moist, olive brown, fine-grained SAND with SILT (SP-SM) (continued).	<u></u>		-			S	ш оз		
35-	Medium dense, moist, olive brown, SANDY SILT (ML), with trace CLAY.			7		24	38	12	0946	
+	Dense, moist, yellowish brown, medium-grained SAND (SP).									
10-				8		35	37	10	0955	
-	Medium dense, moist, yellowish brown, SILTY fine-grained SAND (SM), with abundant shells.									
45-		_		9		27	38	10	1003	
-										
50-	Very stiff, very moist, mottled (olive and yellowish brown), CLAYEY SILT (MH) to SILTY CLAY (CL), with iron oxide veinlets.			10		24	44	10	1013	
-				2						
55-	Medium dense, moist to very moist, olive, SILTY fine-grained SAND (SM).	-		11		24	44	10	1024	
						-				
60-		-		12		42	42	12	1036	
	Dense, moist, olive brown, SANDY SILT (ML), with some iron oxide veinlets.									
65 [.]	Dense, wet, olive, SILTY fine-grained SAND (SM).			13	3	45	46	12	1051	
										Water was noticed at
70	_	-		1	4	34	48	12	1109	approximately 69.4 fe

		Ţ.,	Γ	z			SAM					
DEPTH, feet		LOGOLOGIC		COMPLETION LOG				(bt	/A m)	DRILLING RATE (time)		
TH,	DESCRIPTION	70[MPL	Number		, t	÷ e	->	NE E	REMARK	s
DE		鬥	×	ē ĕ ĕ	Ž	Туре	Blow Count	Head- space	Back- ground	DRI		
	Dense, wet, olive, SILTY fine-grained SAND (SM) (continued).											
-	·	-										
-	Very dense, wet, dark yellowish brown, medium-grained SAND (SP).	1									·	
75-		1			15		64	90	17	1157		
-		1										
80-	Very dense, wet, olive, SILTY fine-grained SAND (SM).											
-		-			16		63	64	19	1218		
-		-										
	·	- 1										
85-	Very dense, wet, olive gray, medium-grained SAND with SILT (SP-SM).	- 11			17		54	66	22	1233		
-												
	··	- 1										
	Dense, wet, olive brown, CLAYEY fine-grained SAND (SC), with abundant shell fragments.											
90-					18		35	58	22	1300		
_	Bottom of boring at 91.5 feet.	- <i>V////</i>										
-	•	-			-							
95-		1										
-											-	
-		-										
								,				
100-		-										
-		-						:				
		-										
		-										
105-												
	•	-										
	ject: Douglas Aircraft		۱ <i>۲</i>)G	OF	•	R∩⊓	SINIC	i W	·CC	12 Figure 2	
Pro	ject Number: 8941863J		L	<i>,</i>	UI.		וטם	MAG	. **		3 of 3	3

3/11/92 2WLOG DACCO

COBBLES	GRA	VEL		SANI		SILT OR CLAY
COBBLES	coarse	fine	coarse	medium	fine	SILI OR CLAY

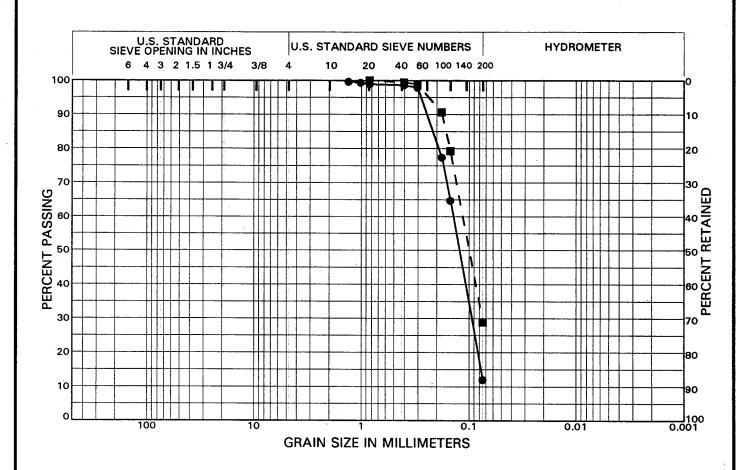

Sample Number	Depth (feet)	Symbol	LL	PI	Classification	
WCC-11		•			Poorly Graded Sand with Silt (SP-SM)	
WCC-12					Silty Sand (SM)	

Project: Douglas Aircraft
Project Number: 8941863J

GRAIN SIZE
DISTRIBUTION CURVES

Figure 3

3/11/92 2SIEVE DACCO



APPENDIX C ANALYTICAL RESULTS AND CHAIN-OF-CUSTODY FORMS

October 12, 1990

RECEIVED

OCT 1 6 1990

WCC-SANTA ANA

WEST COAST ANALYTICAL

ANALYTICAL CHEMISTS

SERVICE, INC.

.

Attn:

Dr. Alistaire Callender

JOB NO.

16763

WOODWARD-CLYDE CONSULTANTS

203 N. Golden Circle Dr.

Santa Ana, CA 92705

LABORATORY REPORT

Samples Received: Two (2) waters in quintuplet and one (1)

trip blank

Date Received: 10-4-90

Date Released for Analysis: 10-9-90

Purchase Order No: Proj#: 8941863J/Douglas Aircraft

The samples were analyzed as follows:

Samples Analyzed

<u>Analysis</u>

Results

Four (4) waters

Volatile Organics by

EPA 624

Data Sheets

Four (4) waters

Surrogate Percent Recoveries

for EPA 624

Data Sheet

Page 1 of 1

B. Michael Hovanec Senior Staff Chemist D.G. Northington, Ph.D.
President

9840 Alburtis Avenue • Santa Fe Springs, California 90670 • 213/948-2225 • FAX 213/948-5850

CLIENT: WOODWARD CLYDE CONSULTANTS SAMPLE: TRIP BLANK

WCAS JOB #: 16763

DATE RECEIVED: 10/04/90 RUN NUMBER: 16763V1
DATE EXTRACTED: 10/10/90 SAMPLE AMOUNT: 5ML

DATE ANALYZED: 10/10/90 SAMPLE AMOUNT: 5ML MATRIX: WATER

VOLATILE ORGANICS (EPA 624/8240) UNITS: UG/L (PPB)

CAS #	COMPOUND	CONCENTRATION	DET LIMIT
67-64-1	ACETONE	7.	5.
71-43-2	BENZENE	ND	1.
75-27-2	BROMODICHLOROMETHANE	ND	1.
75-25-2	BROMOFORM	ND	1.
74-83-9	BROMOMETHANE	ND	5.
78-93-3	2-BUTANONE (MEK)	ND	5.
75-15-0	CARBON DISULFIDE	ND	1.
56-23-5	CARBON TETRACHLORIDE	ND	1.
108-90-7	CHLOROBENZENE	ND	1.
75-00-3	CHLOROETHANE	ND	5.
110-75-8	2-CHLOROETHYLVINYL ETHER	ND	10.
67-66-3	CHLOROFORM	ND	1.
74-87-3	CHLOROMETHANE	ND	5.
108-41-8	CHLOROTOLUENE	ND	1.
124-48-1	DIBROMOCHLOROMETHANE	ND	1.
95-50-1	1,2-DICHLOROBENZENE	ND	1.
541-73-1		ND	1.
106-46-7	1,4-DICHLOROBENZENE	ND	1.
75-34-3	1,1-DICHLOROETHANE	ND	1.
107-06-2	1,2-DICHLOROETHANE	ND	ī.
75-35-4	1,1-DICHLOROETHYLENE	ND	ī.
156-59-4	CIS-1,2-DICHLOROETHYLENE	ND	1.
156-60-5	TRANS-1,2-DICHLOROETHYLENE	ND	1.
78-87-5	1,2-DICHLOROPROPANE	ND	1.
10061-01-5	CIS-1,3-DICHLOROPROPENE	ND	ī.
10061-02-6	TRANS-1,3-DICHLOROPROPENE	ND	1.
100-41-4	ETHYLBENZENE	ND	1.
106-93-4	ETHYLENE DIBROMIDE	ND	1.
76-13-1	FREON-TF	ND	1.
119-78-6	2-HEXANONE	ND	5.
75-09-2	METHYLENE CHLORIDE	ND	5.
108-10-1	4-METHYL-2-PENTANONE (MIBK)	ND	5.
100-42-5	STYRENE	ND	1.
79-34-5	1,1,2,2-TETRACHLOROETHANE	ND	1.
127-18-4	TETRACHLOROETHYLENE	ND	1.
109-99-9	TETRAHYDROFURAN	ND	5.
108-88-3	TOLUENE	ND	1.
71-55-6	1,1,1-TRICHLOROETHANE	ND	1.
79-00-5	1,1,2-TRICHLOROETHANE	ND	1.
79-01-6	TRICHLOROETHYLENE	ND	1.
75-69-4	TRICHLOROFLUOROMETHANE	ND	1.
108-05-4	VINYL ACETATE	ND	5.
75-01-4	VINYL CHLORIDE	ND	5. 5.
95-47-6	TOTAL XYLENES	ND ND	
	TATUTE WITHING	ND	1.

TENTATIVELY IDENTIFIED COMPOUNDS

CLIENT:

WOODWARD CLYDE CONSULTANTS

SAMPLE: TRIP BLANK

WCAS JOB #: 16763

UNITS: UG/L (PPB)

APPROXIMATE FRACTION CONCENTRATION

COMPOUND NAME

1 NONE FOUND VOA

CLIENT: WOODWARD CLYDE CONSULTANTS SAMPLE: WCC-11S-1B

WCAS JOB #: 16763

DATE RECEIVED: 10/04/90 RUN NUMBER: 16763V2
DATE EXTRACTED: 10/10/90 SAMPLE AMOUNT: 5ML
DATE ANALYZED: 10/10/90 MATRIX: WATER

VOLATILE ORGANICS (EPA 624/8240) UNITS: UG/L (PPB)

CAS #	COMPOUND	CONCENTRATION	DET LIMIT
67-64-1	ACETONE	ND	5.
71-43-2	BENZENE	ND	1.
75-27-2	BROMODICHLOROMETHANE	ND	ī.
75-25-2	BROMOFORM	ND	ī.
74-83-9	BROMOMETHANE	ND	5.
78-93-3	2-BUTANONE (MEK)	ND	5.
75-15-0	CARBON DISULFIDE	ND	1.
56-23-5	CARBON TETRACHLORIDE	ND	1.
108-90-7	CHLOROBENZENE	ND	1.
75-00-3	CHLOROETHANE	ND	5.
110-75-8	2-CHLOROETHYLVINYL ETHER	ND	10.
67-66-3	CHLOROFORM	ND	10.
74-87-3	CHLOROMETHANE	ND	5.
108-41-8	CHLOROTOLUENE	ND	= '
124-48-1	DIBROMOCHLOROMETHANE		1.
95-50-1	1,2-DICHLOROBENZENE	ND	1.
541-73-1	1,3-DICHLOROBENZENE	ND	1.
106-46-7	1,4-DICHLOROBENZENE	ND	1.
75 - 34-3	1 1-DICHLOROBENZENE	ND	1.
107-06-2	1,1-DICHLOROETHANE	ND	1.
75-35-4	1,2-DICHLOROETHANE	ND	1.
156-59-4	1,1-DICHLOROETHYLENE	3.	1.
156-69-4	CIS-1,2-DICHLOROETHYLENE	1.	1.
78-87-5	TRANS-1,2-DICHLOROETHYLENE	ND	1.
•	1,2-DICHLOROPROPANE	ND	1.
10061-01-5 10061-02-6	CIS-1,3-DICHLOROPROPENE	ND	1.
	TRANS-1,3-DICHLOROPROPENE	ND	1.
100-41-4	ETHYLBENZENE	ND	1.
106-93-4	ETHYLENE DIBROMIDE	ND 🕟	1.
76-13-1	FREON-TF	ND	1.
119-78-6	2-HEXANONE	ND	5.
75-09-2	METHYLENE CHLORIDE	ND	5.
108-10-1	4-METHYL-2-PENTANONE (MIBK)	ND	5.
100-42-5	STYRENE	ND	1.
79-34-5	1,1,2,2-TETRACHLOROETHANE	ND	1.
127-18-4	TETRACHLOROETHYLENE	ND	1.
109-99-9	TETRAHYDROFURAN	ND	5.
108-88-3	TOLUENE	ND	1.
71-55-6	1,1,1-TRICHLOROETHANE	ND	ī.
79-00-5	1,1,2-TRICHLOROETHANE	ND	1.
79-01-6	TRICHLOROETHYLENE	21.	ī.
75-69-4	TRICHLOROFLUOROMETHANE	ND	1.
108-05-4	VINYL ACETATE	ND	5.
	_ _ 	1112	. د
75-01-4	VINYL CHLORIDE	ND	5.

TENTATIVELY IDENTIFIED COMPOUNDS

CLIENT: WOODWARD CLYDE CONSULTANTS SAMPLE: WCC-11S-1B

WCAS JOB #: 16763

UNITS: UG/L (PPB)

APPROXIMATE

COMPOUND NAME

FRACTION CONCENTRATION

1 NONE FOUND

VOA

CLIENT: WOODWARD CLYDE CONSULTANTS SAMPLE: WCC-12S-1B

WCAS JOB #: 16763

DATE RECEIVED: 10/04/90 RUN NUMBER: 16763V3
DATE EXTRACTED: 10/10/90 SAMPLE AMOUNT: 5ML
DATE ANALYZED: 10/10/90 MATRIX: WATER

VOLATILE ORGANICS (EPA 624/8240) UNITS: UG/L (PPB)

CAS #	COMPOUND	CONCENTRATION	DET LIMIT
67-64-1	ACETONE	ND	5.
71-43-2	BENZENE	5.	1.
75-27-2	BROMODICHLOROMETHANE	ND	1.
75-25-2	BROMOFORM	ND	1.
74-83-9	BROMOMETHANE	ND	5.
78-93-3	2-BUTANONE (MEK)	ND	5.
75-15-0	CARBON DISULFIDE	ND	1.
56-23-5	CARBON TETRACHLORIDE	ND	1.
108-90-7	CHLOROBENZENE	ND	1.
75-00-3	CHLOROETHANE	ND	5.
110-75-8	2-CHLOROETHYLVINYL ETHER	ND	10.
67-66-3	CHLOROFORM	8.	1.
74-87-3	CHLOROMETHANE	ND	5.
108-41-8	CHLOROTOLUENE	ND	1.
124-48-1	DIBROMOCHLOROMETHANE	ND	1.
95-50-1	1,2-DICHLOROBENZENE	ND	ī.
541-73-1	1,3-DICHLOROBENZENE	ND	1.
106-46-7	1,4-DICHLOROBENZENE	ND	ī.
75-34-3	1,1-DICHLOROETHANE	15.	ī.
107-06-2	1,2-DICHLOROETHANE	3.	1.
75-35-4	1,1-DICHLOROETHYLENE	1100.	ī.
156-59-4	CIS-1,2-DICHLOROETHYLENE	36.	1.
156-60-5	TRANS-1,2-DICHLOROETHYLENE	15.	1.
78-87-5	1,2-DICHLOROPROPANE	ND	1.
10061-01-5	CIS-1,3-DICHLOROPROPENE	ND	1.
10061-02-6	TRANS-1,3-DICHLOROPROPENE	ND	1.
100-41-4	ETHYLBENZENE	ND	1.
106-93-4	ETHYLENE DIBROMIDE	ND ND	1.
76-13-1	FREON-TF	ND	1.
119-78-6	2-HEXANONE	ND	5.
75-09-2	METHYLENE CHLORIDE	ND	5.
108-10-1	4-METHYL-2-PENTANONE (MIBK)	ND	5.
100-42-5	STYRENE	ND	1.
79-34-5	1,1,2,2-TETRACHLOROETHANE	ND	1.
127-18-4	TETRACHLOROETHYLENE	ND	1.
109-99-9	TETRAHYDROFURAN	ND	5.
108-88-3	TOLUENE	ND	1.
71-55-6	1,1,1-TRICHLOROETHANE	86.	1.
79-00-5	1,1,2-TRICHLOROETHANE	4.	1.
79-01-6	TRICHLOROETHYLENE	1700.	1.
75-69-4	TRICHLOROFLUOROMETHANE	ND	1.
108-05-4	VINYL ACETATE	ND	5.
75-01-4	VINYL CHLORIDE	ND	5.
95-47-6	TOTAL XYLENES	ND	1.
· -· •		1417	т.

CLIENT: WOODWARD CLYDE CONSULTANTS

SAMPLE: WCC-12S-1B

WCAS JOB #: 16763

UNITS: UG/L (PPB)

COMPOUND NAME

APPROXIMATE FRACTION CONCENTRATION

1 NONE FOUND

CLIENT: WOODWARD CLYDE CONSULTANTS SAMPLE: WCC-12S-1C

WCAS JOB #: 16763

DATE RECEIVED: 10/04/90 RUN NUMBER: 16763V4
DATE EXTRACTED: 10/10/90 SAMPLE AMOUNT: 5ML
DATE ANALYZED: 10/10/90 MATRIX: WATER

VOLATILE ORGANICS (EPA 624/8240) UNITS: UG/L (PPB)

CAS #	COMPOUND	CONCENTRATION	DET LIMIT
67-64-1	ACETONE	ND	5.
71-43-2	BENZENE	4.	1.
75-27-2	BROMODICHLOROMETHANE	ND	i.
75-25-2	BROMOFORM	ND	1.
74-83-9	BROMOMETHANE	ND	5.
78-93-3	2-BUTANONE (MEK)	ND	5.
75-15-0	CARBON DISULFIDE	ND	1.
56 - 23-5	CARBON TETRACHLORIDE	ND	1.
108-90-7	CHLOROBENZENE	ND	ī.
75 - 00-3	CHLOROETHANE	ND	5.
110-75-8	2-CHLOROETHYLVINYL ETHER	ND	10.
67-66-3	CHLOROFORM	7.	1.
74-87-3	CHLOROMETHANE	ND	5.
108-41-8	CHLOROTOLUENE	ND	1.
124-48-1	DIBROMOCHLOROMETHANE	ND	1.
95-50-1	1,2-DICHLOROBENZENE	ND	1.
541-73-1	1,3-DICHLOROBENZENE	ND	1.
106-46-7	1,4-DICHLOROBENZENE	ND	1.
75-34-3	1,1-DICHLOROETHANE	12.	1.
107-06-2	1,2-DICHLOROETHANE	3.	1.
75-35-4	1,1-DICHLOROETHYLENE	930.	1.
156-59-4	CIS-1,2-DICHLOROETHYLENE	31.	1.
156-60-5	TRANS-1,2-DICHLOROETHYLENE	13.	1.
78-87-5	1,2-DICHLOROPROPANE	ND	1.
10061-01-5	,	ND	1.
10061-02-6	TRANS-1,3-DICHLOROPROPENE	ND	1.
100-41-4	ETHYLBENZENE	ND	1.
106-93-4	ETHYLENE DIBROMIDE	ND ·	1.
76-13-1	FREON-TF	ND	1.
119-78-6	2-HEXANONE	ND	5.
75-09-2	METHYLENE CHLORIDE	ND	5.
108-10-1		ND	5.
100-42-5	STYRENE	ND	1.
79-34-5	1,1,2,2-TETRACHLOROETHANE	ND	1.
127-18-4	TETRACHLOROETHYLENE	ND	1.
109-99-9	TETRAHYDROFURAN	ND	5.
108-88-3	TOLUENE	ND	1.
71-55-6	1,1,1-TRICHLOROETHANE	73.	1.
79-00-5	1,1,2-TRICHLOROETHANE	4.	1.
79-01-6	TRICHLOROETHYLENE	1500.	1.
75-69-4	TRICHLOROFLUOROMETHANE	ND	1.
108-05-4	VINYL ACETATE	ND	5.
75-01-4	VINYL CHLORIDE	ND	5.
95-47-6	TOTAL XYLENES	ND	1.

CLIENT:

WOODWARD CLYDE CONSULTANTS SAMPLE: WCC-12S-1C

WCAS JOB #: 16763

UNITS: UG/L (PPB)

APPROXIMATE FRACTION

CONCENTRATION

COMPOUND NAME

1 NONE FOUND

CLIENT: WOODWARD CLYDE CONSULTANTS SAMPLE: LAB BLANK

WCAS JOB #: 16763

DATE RECEIVED: 10/04/90 RUN NUMBER: VBLK571
DATE EXTRACTED: 10/10/90 SAMPLE AMOUNT: 5ML
DATE ANALYZED: 10/10/90 MATRIX: WATER

VOLATILE ORGANICS (EPA 624/8240) UNITS: UG/L (PPB)

CAS #	COMPOUND	CONCENTRATION	DET LIMIT
67-64-1	ACETONE	ND	
71-43-2	BENZENE	ND	1.
75-27-2	BROMODICHLOROMETHANE	ND	1.
75-25-2	BROMOFORM	ND	1.
74-83-9	BROMOMETHANE	ND	5.
78-93-3	2-BUTANONE (MEK)	ND	5.
75-15-0	CARBON DISULFIDE	ND	1.
56-23-5	CARBON TETRACHLORIDE	ND	1.
108-90-7	CHLOROBENZENE	ND	1.
75-00-3	CHLOROETHANE	ND	5.
110-75-8	2-CHLOROETHYLVINYL ETHER	ND	10.
67-66-3	CHLOROFORM	ND	1.
74-87-3	CHLOROMETHANE	ND	5.
108-41-8	CHLOROTOLUENE	ND	1.
124-48-1	DIBROMOCHLOROMETHANE	ND	1.
95-50-1	1,2-DICHLOROBENZENE	ND	1.
541-73-1	1,3-DICHLOROBENZENE	ND	1.
106-46-7	1,4-DICHLOROBENZENE	ND	1.
75-34-3	1,1-DICHLOROETHANE	ND	1.
107-06-2	1,2-DICHLOROETHANE	ND	1.
75-35-4	1,1-DICHLOROETHYLENE	ND	1.
156-59-4	CIS-1,2-DICHLOROETHYLENE	ND	1.
156-60-5	TRANS-1, 2-DICHLOROETHYLENE	ND	1.
78-87-5	1,2-DICHLOROPROPANE	ND ND	1.
10061-01-5	CIS-1,3-DICHLOROPROPENE	ND	1.
10061-02-6	TRANS-1,3-DICHLOROPROPENE	ND	1.
100-41-4	ETHYLBENZENE	ND	1.
106-93-4	ETHYLENE DIBROMIDE	ND ND	1.
76-13-1	FREON-TF	ND	1.
119-78-6	2-HEXANONE	ND	5.
75-09-2	METHYLENE CHLORIDE	ND	5.
108-10-1	4-METHYL-2-PENTANONE (MIBK)	ND	5.
100-42-5	STYRENE	ND	1.
79-34-5	1,1,2,2-TETRACHLOROETHANE	ND	1.
127-18-4	TETRACHLOROETHYLENE	ND	_
109-99-9	TETRAHYDROFURAN	ND	1. 5.
108-88-3	TOLUENE	ND	1.
71-55-6	1,1,1-TRICHLOROETHANE	ND	1.
79-00-5	1,1,2-TRICHLOROETHANE	ND	
79-01-6	TRICHLOROETHYLENE	ND	1.
75-69-4	TRICHLOROFLUOROMETHANE	ND	1.
108-05-4	VINYL ACETATE	ND ND	1.
75-01-4	VINYL CHLORIDE		5.
95-47-6	TOTAL XYLENES	ND	5.
	TOTAL VIHENES	ND	1.

CLIENT: WOODWARD CLYDE CONSULTANTS

SAMPLE: LAB BLANK

WCAS JOB #: 16763

UNITS: UG/L (PPB)

COMPOUND NAME

APPROXIMATE FRACTION CONCENTRATION

NONE FOUND

CLIENT: WOODWARD CLYDE CONSULTANTS SAMPLE: LAB BLANK

WCAS JOB #: 16763

DATE RECEIVED: 10/04/90 RUN NUMBER: VBLK572 DATE EXTRACTED: 10/11/90 SAMPLE AMOUNT: 5ML WATER

DATE ANALYZED: 10/11/90 MATRIX:

VOLATILE ORGANICS (EPA 624/8240) UNITS: UG/L (PPB)

CAS #	COMPOUND	CONCENTRATION	DET LIMIT
67-64-1	ACETONE	ND	5.
71-43-2	BENZENE	ND	1.
75-27-2	BROMODICHLOROMETHANE	ŇD	1.
75-25-2	BROMOFORM	ND	1.
74-83-9	BROMOMETHANE	ND	5.
78-93-3	2-BUTANONE (MEK)	ND	5.
75-15-0	CARBON DISULFIDE	ND	1.
56-23-5	CARBON TETRACHLORIDE	ND	ī.
108-90-7	CHLOROBENZENE	ND	1.
75-00-3	CHLOROETHANE	ND	5.
110-75-8	2-CHLOROETHYLVINYL ETHER	ND	10.
67-66-3	CHLOROFORM	ND	1.
74-87-3	CHLOROMETHANE	ND	5.
108-41-8	CHLOROTOLUENE	ND	1.
124-48-1	DIBROMOCHLOROMETHANE	ND	ī.
95-50-1	1,2-DICHLOROBENZENE	ND	1.
541-73-1	1,3-DICHLOROBENZENE	ND	ī.
106-46-7	1,4-DICHLOROBENZENE	ND	ī.
75-34-3	1,1-DICHLOROETHANE	ND	î.
107-06-2	1,2-DICHLOROETHANE	ND	ī.
75-35-4	1,1-DICHLOROETHYLENE	ND	ī.
156-59-4	CIS-1,2-DICHLOROETHYLENE	ND	ī.
156-60-5	TRANS-1,2-DICHLOROETHYLENE	ND	ī.
78-87-5	1,2-DICHLOROPROPANE	ND	1.
10061-01-5	CIS-1,3-DICHLOROPROPENE	ND	ī.
10061-02-6	TRANS-1,3-DICHLOROPROPENE	ND	ī.
100-41-4	ETHYLBENZENE	ND	ī.
106-93-4	ETHYLENE DIBROMIDE	ND	1.
76-13-1	FREON-TF	ND	1.
119-78-6	2-HEXANONE	ND	5.
75-09-2	METHYLENE CHLORIDE	ND	5.
108-10-1	4-METHYL-2-PENTANONE (MIBK)	ND	5.
100-42-5	STYRENE	ND	1.
79-34-5	1,1,2,2-TETRACHLOROETHANE	ND	1.
127-18-4	TETRACHLOROETHYLENE	ND	1.
109-99-9	TETRAHYDROFURAN	ND	5.
108-88-3	TOLUENE	ND	1.
71-55-6	1,1,1-TRICHLOROETHANE	ND	i.
79-00-5	1,1,2-TRICHLOROETHANE	ND	i.
79-01-6	TRICHLOROETHYLENE	ND	1.
75-69-4	TRICHLOROFLUOROMETHANE	ND	1.
108-05-4	VINYL ACETATE	ND	5.
75-01-4	VINYL CHLORIDE	ND	5 .
95-47-6	TOTAL XYLENES	ND	1.
		1417	4.

CLIENT: WOODWARD CLYDE CONSULTANTS SAMPLE: LAB BLANK

WCAS JOB #: 16763

UNITS: UG/L (PPB)

COMPOUND NAME

APPROXIMATE FRACTION CONCENTRATION

1 NONE FOUND

VOLATILE SURROGATE PERCENT RECOVERY SUMMARY

INSTRUMENT : TRIO1
DATE ANALYZED: 10/10/90

ILENAME	SAMPLE ID	1, W/S	2-DICHLORO- ETHANE-d4	TOLUENE-d8	BFB
16763V1 16763V2 16763V3 16763V4 VBLK571	TRIP BLANK WCC-11S-1B WCC-12S-1B WCC-12S-1C LAB BLANK	W W W W	108 109 110 109 108	89 90 90 90 96	91 89 91 93 96
	s -	SOIL	W - WA'	TER	

INSTRUMENT : TRIO1
DATE ANALYZED: 10/11/90

FILENAME	SAMPLE ID	w/s	2-DICHLORO- ETHANE-d4	TOLUENE-d8	BFB
16763V5 16763V6 VBLK572	WCC-12S-1B WCC-12S-1C LAB BLANK	W W W	111 111 111	96 97 95	96 96 95
	s -	SOIL	W - WA	rér	

Data Reporting Qualifiers

- Value If the result is a value greater than or equal to the Detection Limit (DL), the value is reported.
- ND Indicates that the compound was analyzed for but not detected. The minimum DL for the sample with the ND is reported based on necessary concentration or dilution actions.
- TR Indicates an estimated value. This flag is used when the mass spectral data indicates the presence of a compound that meets the identification criteria but the result is less than the specified DL but greater than zero.

September 25, 1990

RECEIVED
SEP % 6 1990

WCC-SANTA ANA

WEST COAST

WEST COAST ANALYTICAL SERVICE, INC.

ANALYTICAL CHEMISTS

Α

203 N. Golden Circle Dr. Santa Ana, CA 92705

WOODWARD-CLYDE CONSULTANTS

Attn:

Dr. Alistaire Callender

JOB NO.

16636

LABORATORY REPORT

Samples Received: Thirty-four (34) Soil Samples

Date Received: 9-17-90

Date Released for Analysis: 9-21-90

Purchase Order No: Proj#: 8941863J Task II/Douglas Aircraft

The samples were analyzed as follows:

Samples Analyzed

Analysis

Results

Three (3) soils

Volatile Organics by

EPA 8240

Data Sheets

Page 1 of 1

B. Michael Hovanec Senior Staff Chemist D. J. Northington, Ph.D.

9840 Alburtis Avenue • Santa Fe Springs, California 90670 • 213/948-2225 • FAX 213/948-5850

CLIENT: WOODWARD CLYDE CONSULTANTS SAMPLE: WCC-11-14-3

WCAS JOB #: 16636

DATE RECEIVED: 09/17/90 RUN NUMBER: 16636V3
DATE EXTRACTED: 09/24/90 SAMPLE AMOUNT: 1.0G
DATE ANALYZED: 09/24/90 MATRIX: SOIL

VOLATILE ORGANICS (EPA 624/8240) UNITS: UG/KG (PPB)

CAS #	COMPOUND	CONCENTRATION	DET LIMIT
67-64-1	ACETONE	ND	30.
71-43-2	BENZENE	ND	5.
75-27-4	BROMODICHLOROMETHANE	ND	5.
75-25-2	BROMOFORM	ND	5.
74-83-9	BROMOMETHANE	ND	30.
78-93-3	2-BUTANONE (MEK)	ND	30.
75-15-0	CARBON DISULFIDE	ND	5.
56-23-5	CARBON TETRACHLORIDE	ND	5.
108-90-7	CHLOROBENZENE	ND	5.
75-00-3	CHLOROETHANE	ND	30.
110-75-8	2-CHLOROETHYLVINYL ETHER	ND	50.
67-66-3	CHLOROFORM	ND	5.
74-87-3	CHLOROMETHANE	ND	30.
108-41-8	CHLOROTOLUENE	ND	5.
124-48-1	DIBROMOCHLOROMETHANE	ND	
95-50-1	1,2-DICHLOROBENZENE	ND	5.
541-73-1	1,3-DICHLOROBENZENE		5.
106-46-7	1,4-DICHLOROBENZENE	ND	5.
75-34-3	1,1-DICHLOROETHANE	ND	5.
107-06-2	1,1-bichloroethane 1,2-dichloroethane	ND	5.
75-35-4	1,2 DICHLOROETHANE	ND	5.
156-59-4	1,1-DICHLOROETHYLENE	ND	5.
156-60-5	CIS-1,2-DICHLOROETHYLENE	ND	5.
78-87-5	TRANS-1,2-DICHLOROETHYLENE	ND	5.
	1,2-DICHLOROPROPANE	ND	5.
10061-01-5	CIS-1,3-DICHLOROPROPENE	ND	5.
10061-02-6	TRANS-1, 3-DICHLOROPROPENE	ND	5.
100-41-4	ETHYLBENZENE	ND	5.
106-93-4	ETHYLENE DIBROMIDE	ND	5.
76-13-1	FREON-TF	ND	5.
119-78-6	2-HEXANONE	ND	30.
75-09-2	METHYLENE CHLORIDE	ND	30.
108-10-1	4-METHYL-2-PENTANONE (MIBK)	ND	30.
100-42-5	STYRENE	ND	5.
79-34-5	1,1,2,2-TETRACHLOROETHANE	ND	5.
127-18-4	TETRACHLOROETHYLENE	ND	5.
109-99-9	TETRAHYDROFURAN	ND	30.
108-88-3	TOLUENE	ND	5.
71-55-6	1,1,1-TRICHLOROETHANE	ND	5.
79-00-5	1,1,2-TRICHLOROETHANE	ND	5.
79-01-6	TRICHLOROETHYLENE	9.	5 .
75-69-4	TRICHLOROFLUOROMETHANE	ND	5 .
108-05-4	VINYL ACETATE	ND	30.
75-01-4	VINYL CHLORIDE	ND	30.
95 -47- 6	TOTAL XYLENES	ND	
		מא	5.

CLIENT:

WOODWARD CLYDE CONSULTANTS

SAMPLE: WCC-11-14-3

WCAS JOB #: 16636

UNITS: UG/KG (PPB)

APPROXIMATE

COMPOUND NAME

FRACTION CONCENTRATION

NONE FOUND

CLIENT: WOODWARD CLYDE CONSULTANTS SAMPLE: WCC-12-14-3

WCAS JOB #: 16636

DATE RECEIVED: 09/17/90 RUN NUMBER: 16636V1
DATE EXTRACTED: 09/24/90 SAMPLE AMOUNT: 1.0G
DATE ANALYZED: 09/24/90 MATRIX: SOIL

VOLATILE ORGANICS (EPA 624/8240) UNITS: UG/KG (PPB)

CAS #	COMPOUND	CONCENTRATION	DET LIMIT		
67-64-1	ACETONE	 ND	30.		
71-43-2	BENZENE	ND	5.		
75-27-4	BROMODICHLOROMETHANE	ND	5.		
75-25-2	BROMOFORM	ND	5.		
74-83-9	BROMOMETHANE	ND	30.		
78-93-3	2-BUTANONE (MEK)	ND	30.		
75-15-0	CARBON DISULFIDE	ND	5.		
56-23-5	CARBON TETRACHLORIDE	ND	5.		
108-90-7	CHLOROBENZENE	ND	5.		
75-00-3	CHLOROETHANE	ND	30.		
110-75-8	2-CHLOROETHYLVINYL ETHER	ND	50.		
67-66-3	CHLOROFORM	ND	5.		
74-87-3	CHLOROMETHANE	ND	30.		
108-41-8	CHLOROTOLUENE	ND	5.		
124-48-1	DIBROMOCHLOROMETHANE	ND	5.		
95-50-1	1,2-DICHLOROBENZENE	ND	5.		
541-73-1	1,3-DICHLOROBENZENE	ND	5.		
106-46-7	1,4-DICHLOROBENZENE	ND	5.		
75-34-3	1,1-DICHLOROETHANE	ND	5.		
107-06-2	1,2-DICHLOROETHANE	ND	5.		
75-35-4	1,1-DICHLOROETHYLENE	ND ND	5.		
156-59-4	CIS-1,2-DICHLOROETHYLENE	ND	5.		
156-60-5	TRANS-1, 2-DICHLOROETHYLENE	ND	5 .		
78-87-5	1,2-DICHLOROPROPANE	ND	5.		
10061-01-5	CIS-1,3-DICHLOROPROPENE	ND ND	5.		
10061-02-6	TRANS-1, 3-DICHLOROPROPENE	ND	5.		
100-41-4	ETHYLBENZENE	ND ND	5.		
106-93-4	ETHYLENE DIBROMIDE	ND	5.		
76-13-1	FREON-TF	ND ND	5. 5.		
119-78-6	2-HEXANONE	ND ND	30.		
75-09-2	METHYLENE CHLORIDE	ND	30.		
108-10-1	4-METHYL-2-PENTANONE (MIBK)	ND	30.		
100-42-5	STYRENE CIENTANONE (MIBR)	ND	5.		
79-34-5	1,1,2,2-TETRACHLOROETHANE	ND	5. 5.		
127-18-4	TETRACHLOROETHYLENE				
109-99-9	TETRAHYDROFURAN	ND	5.		
108-88-3	TOLUENE	ND	30.		
71-55-6	1,1,1-TRICHLOROETHANE	ND	5.		
79-00-5	1,1,2-TRICHLOROETHANE	ND	5 .		
79-01-6	TRICHLOROETHYLENE	ND	5.		
75-69-4	TRICHLOROFLUOROMETHANE	14.	5.		
108-05-4	VINYL ACETATE	ND	5.		
75-01-4	VINIL ACEIATE VINYL CHLORIDE	ND	30.		
95-47-6	TOTAL XYLENES	ND	30.		
73 47-0	TOTUT VITENCO	ND	5.		

CLIENT:

WOODWARD CLYDE CONSULTANTS

SAMPLE: WCC-12-14-3

WCAS JOB #: 16636

UNITS: UG/KG (PPB)

APPROXIMATE

COMPOUND NAME

FRACTION CONCENTRATION

NONE FOUND

CLIENT: WOODWARD CLYDE CONSULTANTS SAMPLE: WCC-12-15-3

WCAS JOB #: 16636

......

DATE RECEIVED: 09/17/90 RUN NUMBER: 16636V2
DATE EXTRACTED: 09/24/90 SAMPLE AMOUNT: 1.0G
DATE ANALYZED: 09/24/90 MATRIX: SOIL

VOLATILE ORGANICS (EPA 624/8240) UNITS: UG/KG (PPB)

10211222					
CAS #	COMPOUND	CONCENTRATION	DET LIMIT		
67-64-1	ACETONE	ND	30.		
71-43-2	BENZENE	ND	5.		
75-27-4	BROMODICHLOROMETHANE	ND	5.		
75-25-2	BROMOFORM	ND	5.		
74-83-9	BROMOMETHANE	ND	30.		
78-93-3	2-BUTANONE (MEK)	ND	30.		
75-15-0	CARBON DISULFIDE	ND	5.		
56-23-5	CARBON TETRACHLORIDE	ND	5.		
108-90-7	CHLOROBENZENE	ND	5.		
75-00-3	CHLOROETHANE	ND	30.		
110-75-8	2-CHLOROETHYLVINYL ETHER	ND	50.		
67-66-3	CHLOROFORM	ND	5.		
74-87-3	CHLOROMETHANE	ND	30.		
108-41-8	CHLOROTOLUENE	ND	5.		
124-48-1	DIBROMOCHLOROMETHANE	ND	5.		
95-50-1	1,2-DICHLOROBENZENE	ND	5.		
541-73-1	1,3-DICHLOROBENZENE	ND	5.		
106-46-7	1,4-DICHLOROBENZENE	ND	5.		
75-34-3	1,1-DICHLOROETHANE	ND	5.		
107-06-2	1,2-DICHLOROETHANE	ND	5.		
75-35-4	1,1-DICHLOROETHYLENE	ND	5.		
156-59-4	CIS-1,2-DICHLOROETHYLENE	ND	5.		
156-60-5	TRANS-1,2-DICHLOROETHYLENE	ND	5.		
78-87-5	1,2-DICHLOROPROPANE	ND	5.		
10061-01-5	CIS-1,3-DICHLOROPROPENE	ND	5.		
10061-02-6	TRANS-1,3-DICHLOROPROPENE	ND	5.		
100-41-4	ETHYLBENZENE	. ND	5.		
106-93-4	ETHYLENE DIBROMIDE	ND	5.		
76-13-1	FREON-TF	ND	5.		
119-78-6	2-HEXANONE	ND	30.		
75-09-2	METHYLENE CHLORIDE	ND	30.		
108-10-1	4-METHYL-2-PENTANONE (MIBK)	ND	30.		
100-42-5	STYRENE	ND	5.		
79-34-5	1,1,2,2-TETRACHLOROETHANE	ND	5.		
127-18-4	TETRACHLOROETHYLENE	ND	5.		
109-99-9	TETRAHYDROFURAN	ND	30.		
108-88-3	TOLUENE	ND	5.		
71-55-6	1,1,1-TRICHLOROETHANE	ND	5.		
79-00-5	1,1,2-TRICHLOROETHANE	ND	5.		
79-00-5	TRICHLOROETHYLENE	26.	5.		
75-69-4	TRICHLOROFLUOROMETHANE	ND	5.		
108-05-4	VINYL ACETATE	ND	30.		
75-01-4	VINYL CHLORIDE	ND	30.		
95-47-6	TOTAL XYLENES	ND	5.		

CLIENT: WOODWARD CLYDE CONSULTANTS SAMPLE: WCC-12-15-3

WCAS JOB #: 16636

UNITS: UG/KG (PPB)

APPROXIMATE

COMPOUND NAME

FRACTION CONCENTRATION

1 NONE FOUND

Data Reporting Qualifiers

- Value If the result is a value greater than or equal to the Detection Limit (DL), the value is reported.
- ND Indicates that the compound was analyzed for but not detected. The minimum DL for the sample with the ND is reported based on necessary concentration or dilution actions.
- TR Indicates an estimated value. This flag is used when the mass spectral data indicates the presence of a compound that meets the identification criteria but the result is less than the specified DL but greater than zero.

Woodward-Clyde Consultants

_
_
•

CHAIN OF CUSTODY RECORD

SHIPMENT	NO.:	1

PAGE ____ OF __ __ ___

DATE 9 1171 95

PROJECT NAME: DOUGLAS	AIRCRAFT CO
PROJECT WANTE	1
PROJECT NO.: 2941663	<u> </u>

Type of Preservation Analysis Required* Type of Sample Type of Container Sample Number Location Temp Chemical Method Material CONTACT 103 BRASS TUBE DRIVE Soil war-11 WCC-11-1-3 ALLOTA, RE . | 11-2-3 CALLENDAR 11-3-3 11- 4-3 11-5-3 1 11-6-3 11-7-3 11-9-3 11-9-3 11_10-7 4-11-3 11-12-3 11-13-3 11_14-3 11 16-3 11-17-3 Total Number of Samples Shipped: 17 Sampler's Signature: Date Received By: Relinquished By: 9117196 Signature__ Printed Name 11 2 70 Time Company___ Company____ Reason__ Received By: Date Relinquished By: Low Blanks 9117 19 Signature___ Signature __ Printed Name / Company 12/25 Time Printed Name___ :50 Company____ 16636 Reason.... Date Received By: Relinquished By: Signature. Signature___ Printed Name___ Time Printed Name___ Company_ Company..... Reason ____ Date Received By: Relinquished By: Signature_

Printed Name___

Company___

Special Shipment / Handling / Storage Requirements:

**NCC-11-15-3 instruct of 17-3

Signature_

Printed Name_

Company____

* Note — This does not constitute authorization to proceed with analysis

LA/OR-0183-421

Time

Woodward-Clyde Consultants



SHIPMENT NO.:____

The second of th

PAGE OF

CHAIN OF CUSTODY RECORD

PROJECT NAME: DOUGLAS AIRCRAFT C DATE 9 117195 PROJECT NO. 2941863

TO THE CONTRACT OF THE PROPERTY OF THE PROPERT

ı		PROJEC		2/3/	} 					
ſ	Sample Number	Location	Type of		Type of	Container		e of Preservation	_ Analysi	is Required*
ŀ			Material	Method	~ ^^		Temp		+	
٦	1000-12-1-3		Soil	DRIVE	27.23	455 TBE	125	Novie		TACT STAIRZ
7	13-2-3	1		`	1					ZUDAZ
7	12-3-3				* ,			 	1 - 2	TUDA
1	12-43							+		145,5
٦	12-53							-	HAV A	(1/3/2
٦	13-3-3	1						 	1	
7	12.7.3	1						+		
٦	<u> </u>									
1	<u> </u>			3						
-	12-11-3	4 :						1		
٦	<u> </u>	- ensiste :					-	<u> </u>		
٦	12-13.3		1							
٦	12-13-3		 							
7	13_14-3									
•	12-15-3								+	
	13-6-3					 				
	17-17-3		1		1/		1/	The state of the s	4	
	15 12-3	1	- Y	*			 \	T Y		
						·	<u> </u>			· · · · · · · · · · · · · · · · · · ·
Ì	Total Number of S	Samples Shi	inned: KC	Sampler	's Signatur	e: MA	16			
								1 0		Date
	Relinquished By: Signature Printed Name	do	124	ر حک	Received By! Signature Printed Name Company					2117170
	Printed Name	1000	Car 1	KR SCS						Time
i	Company Reason	111-1-	<u> </u>							
					Receive	ed By: .7	12	1/-/- 1		Date
	Relinquished By: Signature	2 cmc	look .		Signa	ture		151/ 15-11		911719
	Printed Name	124	31AC	<u> </u>	Received By: Signature Printed Name Company					Time
	Company Reason				_ Com	pany		h 1663	6	Time
	Relinquished By:				Receive	ed By:				Date
	Signature				Signa	ture			···-	<u> </u>
	Printed Name			·						Time
	Company Reason				_ Com	oany				
	Relinguished By:				Receive	ed By:				Date
	Signature				Signa	ture				_/_/
	Printed Name					ed Name				Time
	Company Reason				_	oany				
	Special Shipment	/ Handling	/ Storage F	Requirement	s:			-		1
A		•	6	1 100	· ()	سر بر	- 🤈	4 76	PHIM	· for
×	A 3340	Sain	100	.G	12	- 9-15	. - ا	4 70	,	
		ĺ						:VCC	-12-1	15-3
	* Note — This do	es not con	stitute auth	orization to	proceed	with analysis				
									LA	VOR-0183-421

Woodward-Clyde Consultants

والمرابعة والمنطوع والمنط والمنطوع والمنط والمنطوع والمنطوع والمنطوع والمنطوع والمنط والمنطوع والمنطوع والمنطوع والمنطوع والمنطوع والمنطوع والمنط والمنطوع والمنطوع والمنطوع والمنطوع والمنطوع والمنطوع والمنطوع و



CHAIN OF CUSTODY RECORD

SHIPMENT NO.: Z

PROJECT NAME: DOUGLAS 412 CRAFT
PROJECT NO.: 8941863

PROJECT NO.: 5797505											
0 1 1	Location	Type of Sample		Type of Container		Type of Preservation			rvation	Analysis Required*	
Sample Number		Material			Jontainer	Temp		Chemical		1 Allalysis nequired	
TRIP BLANK		WATER		40ML VOA		10	É	NOUE		COUTACT	
wcc- L-1	wee-L		RAIL	4	11			,			TAINE
1. 1-2	111		1	1.	11					MIL	ENIAR
wec-B-1	W.B			1.	11					F2.2	
4 B-2	11			4	•						1515
	was #45	 		11	11				1.	1	
wc-145_1	11 11			10		- 1					
1, 1, -2.	· · · · · · · · · · · · · · · · · · ·			500 ML	CLASS						, ·
wcc-1/5-1A	MKC-115							<u> </u>	İ		
wcc. 115-12		 		T	GLASS						
1. 1/5-1B		 	 	11	16				 	 	
1' 115-1C	 		 	11	11				<u>!</u>	1	
1. 115 mD	1		 - - 			\vdash				1	
100-125-1R	(UCS-125	 	 	4							
1 155-1B			<u> </u>	//	"						
1. 15-10			<u> </u>	"	11					<u> </u>	
" 125-10				11	11.					ļ	
1 155-1A	<u> </u>	V	<u> </u>	500 ML	C/1+55	1		V	<u>/</u>	<u> </u>	
,,			-								
						-					
					1		0	$\Box \land$	\	<u> </u>	
Total Number of	Samples Sh	ipped: 17	Sample	r's Signature	: 110	11	87	1 Ka	1,01	ノ	
Relinquished By:											Date
Signature Loren Fours					Received By: Signature						<u> 19 F. </u>
Printed Name 48670 1955					Printed Name						Time
Reason ANALYS (5					Printed Name						7
	<u> </u>							Date			
Relinquished By: Signature					Received By: Signature						/ /
Printed Name					Printed Name						Time
Company					Company						rime
Reason											
Relinquished By:					Received By: Signature						Date / /
Signature Printed Name					Printed Name						
Company				Comp	Company						Time
Reason											
Relinquished By:					Received By:						Date
Signature					Signature						
Printed Name					Printed Name						Time
Reason					Company						
Special Shipment / Handling / Storage Requirements:											
Special Surpment	, manumy	, Giorage	requirement		•						
* Note - This do	or not con	ctituta aut	orization t	n proceed w	ith analysis						